


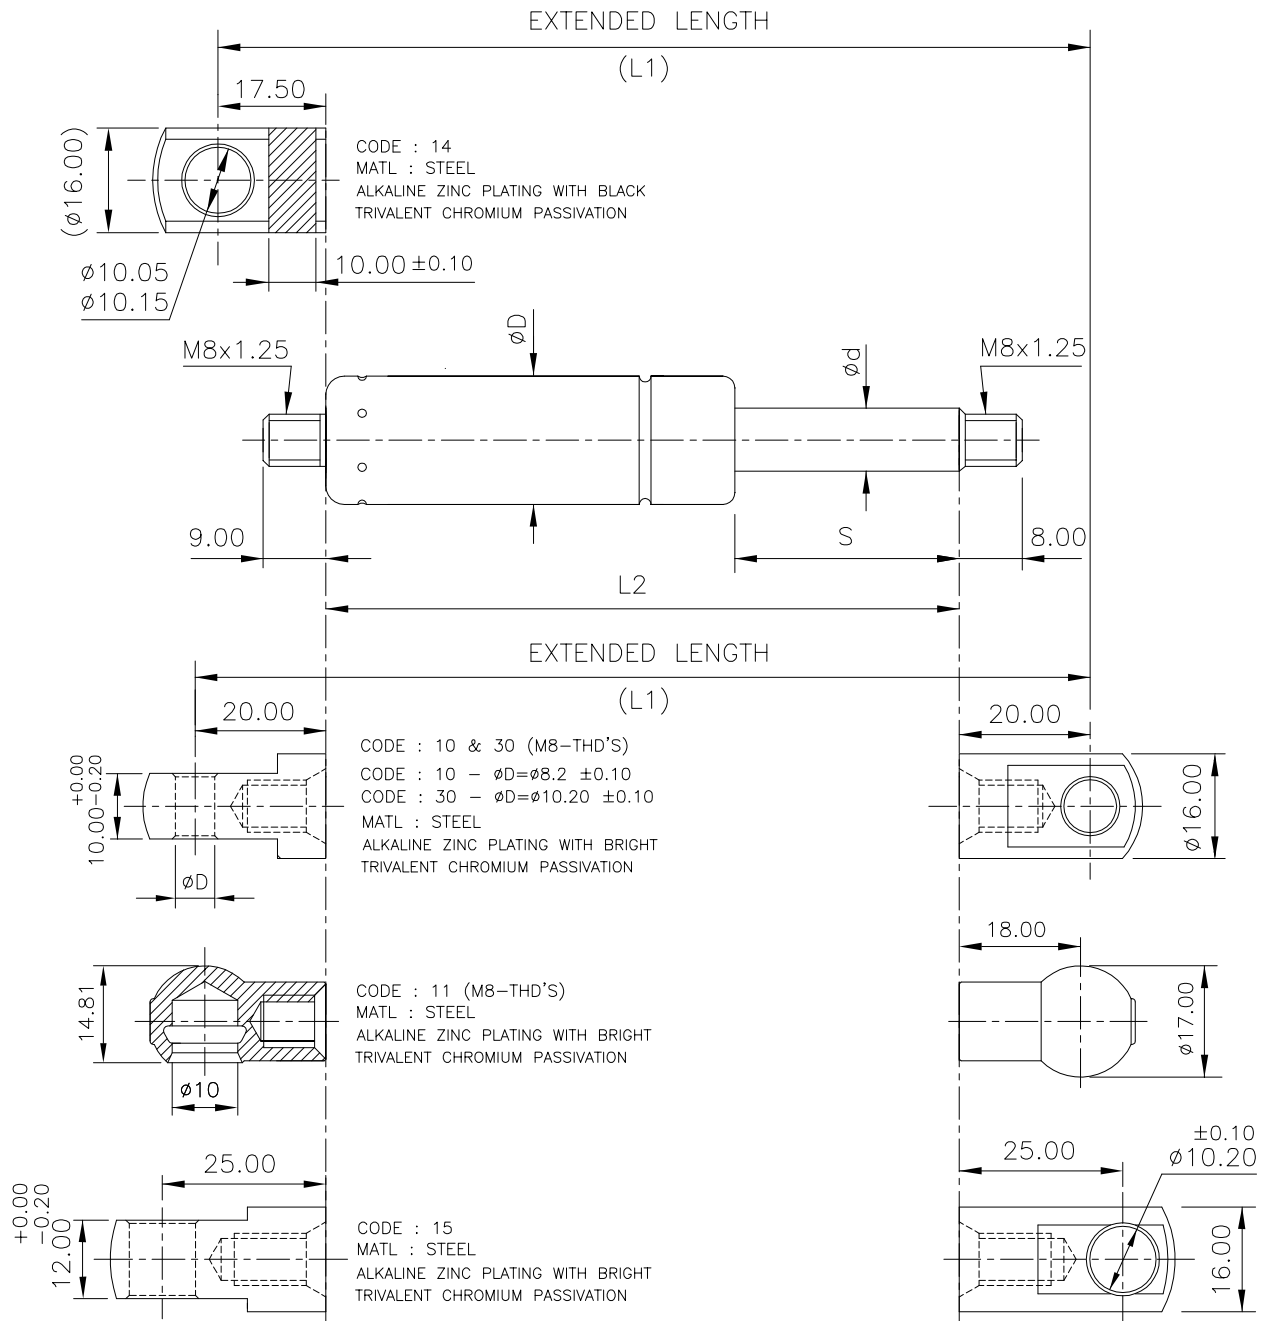

TUBE DIA. ϕD	ROD DIA. ϕd	FORCE (F1) N		STROKE (MM)		STD AVAILABLE STROKE (S) MM		
		MIN.	MAX.	MIN.	MAX.			
$\phi 28.00$	$\phi 10.00$	80	1000	50.00	450.00	60.00	187.00	291.00
						138.00	202.00	300.00
						150.00	245.00	345.00
						171.00	277.00	400.00

ORDER CODE

AL - Dd - XX - L1 - S - F1 - YY - BP
 AUTO-LIFT
 MODEL : TUBE & ROD DIA.
 CODE FOR TUBE SIDE END FITTING
 EXTENDED LENGTH
 STROKE
 FORCE IN NEWTON
 CODE FOR ROD SIDE END FITTING
 CODE FOR BALL PIN

ORDER EXAMPLE : AL - 2810 - 14 - 675 - 270 - 600N - 15 - NA
 ASSUMPTION BP : BALL PIN CONSIDERED AT BOTH SIDES ALONG WITH NUT.

ORDER CODE

FOR GAS-SPRINGS WITH THREADED ENDS.

AL - Dd - TT - L2 - S - F1 - RT
 TUBE END THD'S
 EXTENDED LENGTH
 ROD END THD'S

ORDER EXAMPLE : AL - 2810 - M8 - 675 - 270 - 600N - M8